

Mine Waste: Consolidation Behaviour of Precious Metal Tailings

Monica Figueroa, Dr. Ahlam Abdulnabi, Dr. Nicholas Beier
Department of Civil Engineering, University of Alberta

Introduction

All mine processing plants generate waste. These byproducts include waste rock and a finer grained slurry called 'tailings' (Beier, 2015). The primary objective of treating tailings is to **remove water**, to enhance strength and stiffness (Sobkowicz and Morgenstern, 2009). Studying the geotechnical properties of tailings is essential to understand consolidation behaviour and facilitate land reclamation. Moreover, chemical characteristics of tailings should be examined to establish the potential of acid rock drainage (ARD).

Objectives

The purpose of this study is to investigate the **consolidation and geochemical behaviour** of precious metal tailings in atmospheric conditions. The geochemical parameters of interest are pH, redox potential (EH) and electric conductivity (EC).

Methodology

Large Strain Consolidation (LSC) test

Measure

Measure hydraulic conductivity and geochemical parameters of interest (pH, Eh, Ec)

Load

The mass is increased gradually to control the consolidation process


Consolidate

When the pore pressure dissipates, the tailings have completed the consolidation step.


Results

Geotechnical Parameters


Typical Excess Pore Pressure Dissipation

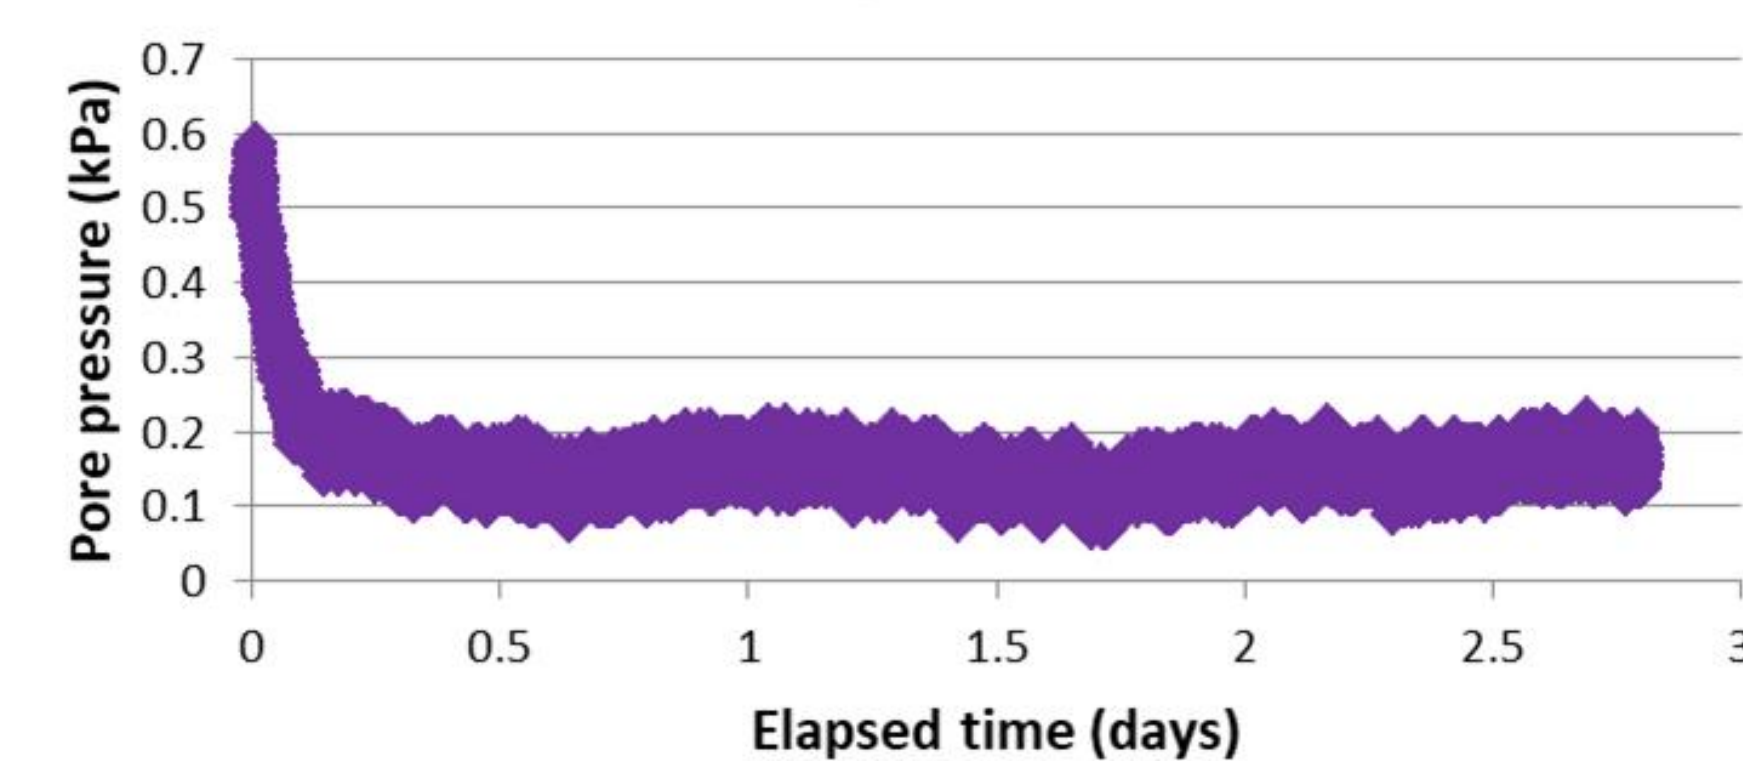

Compressibility

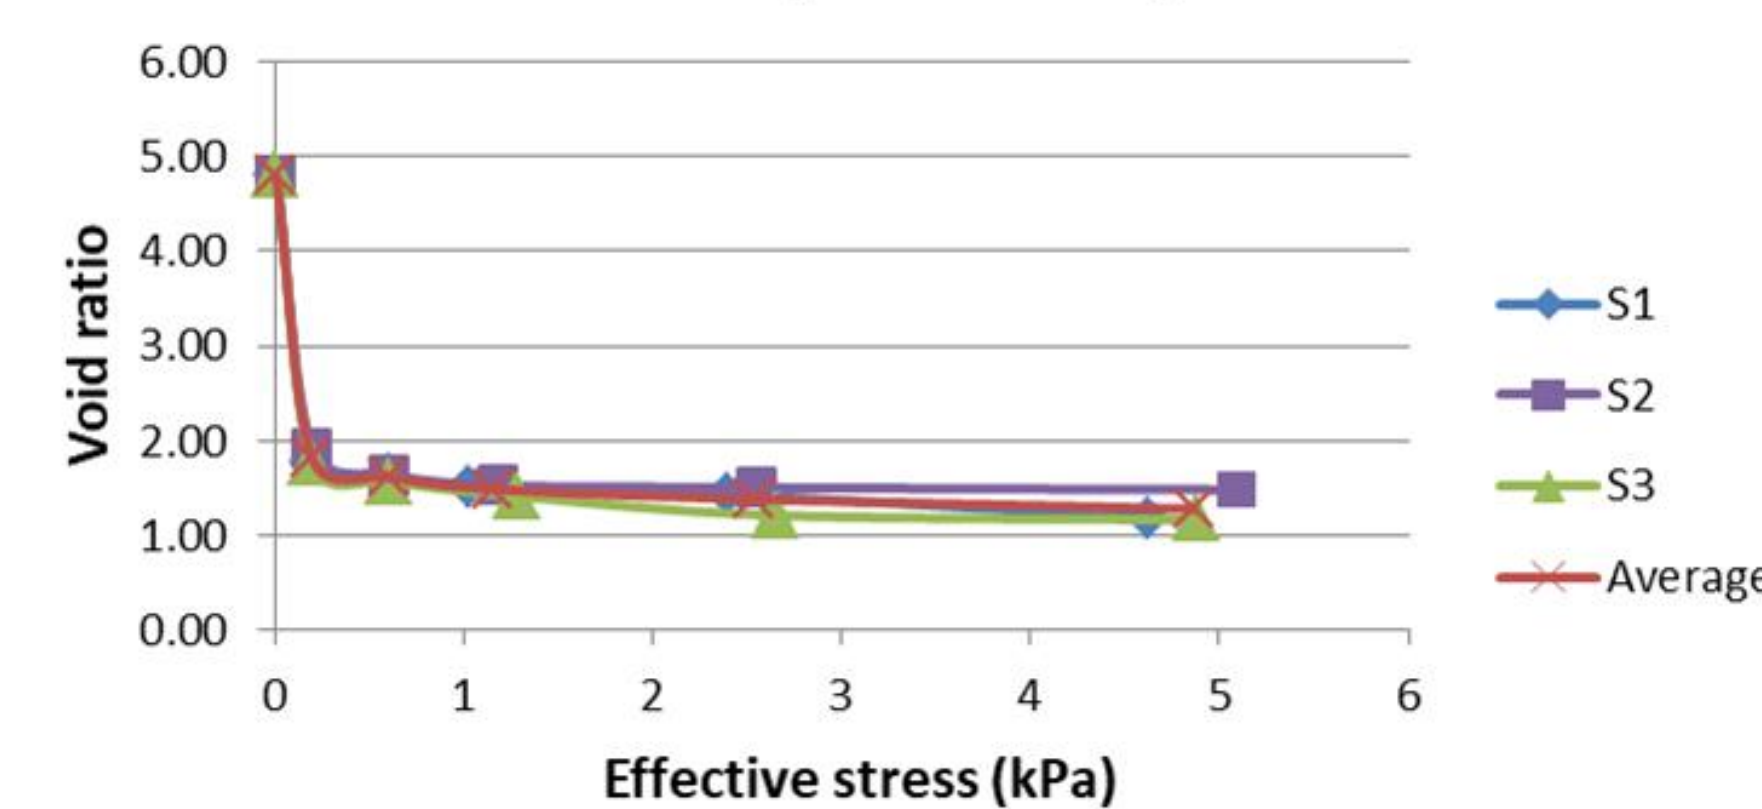

Saturated hydraulic conductivity

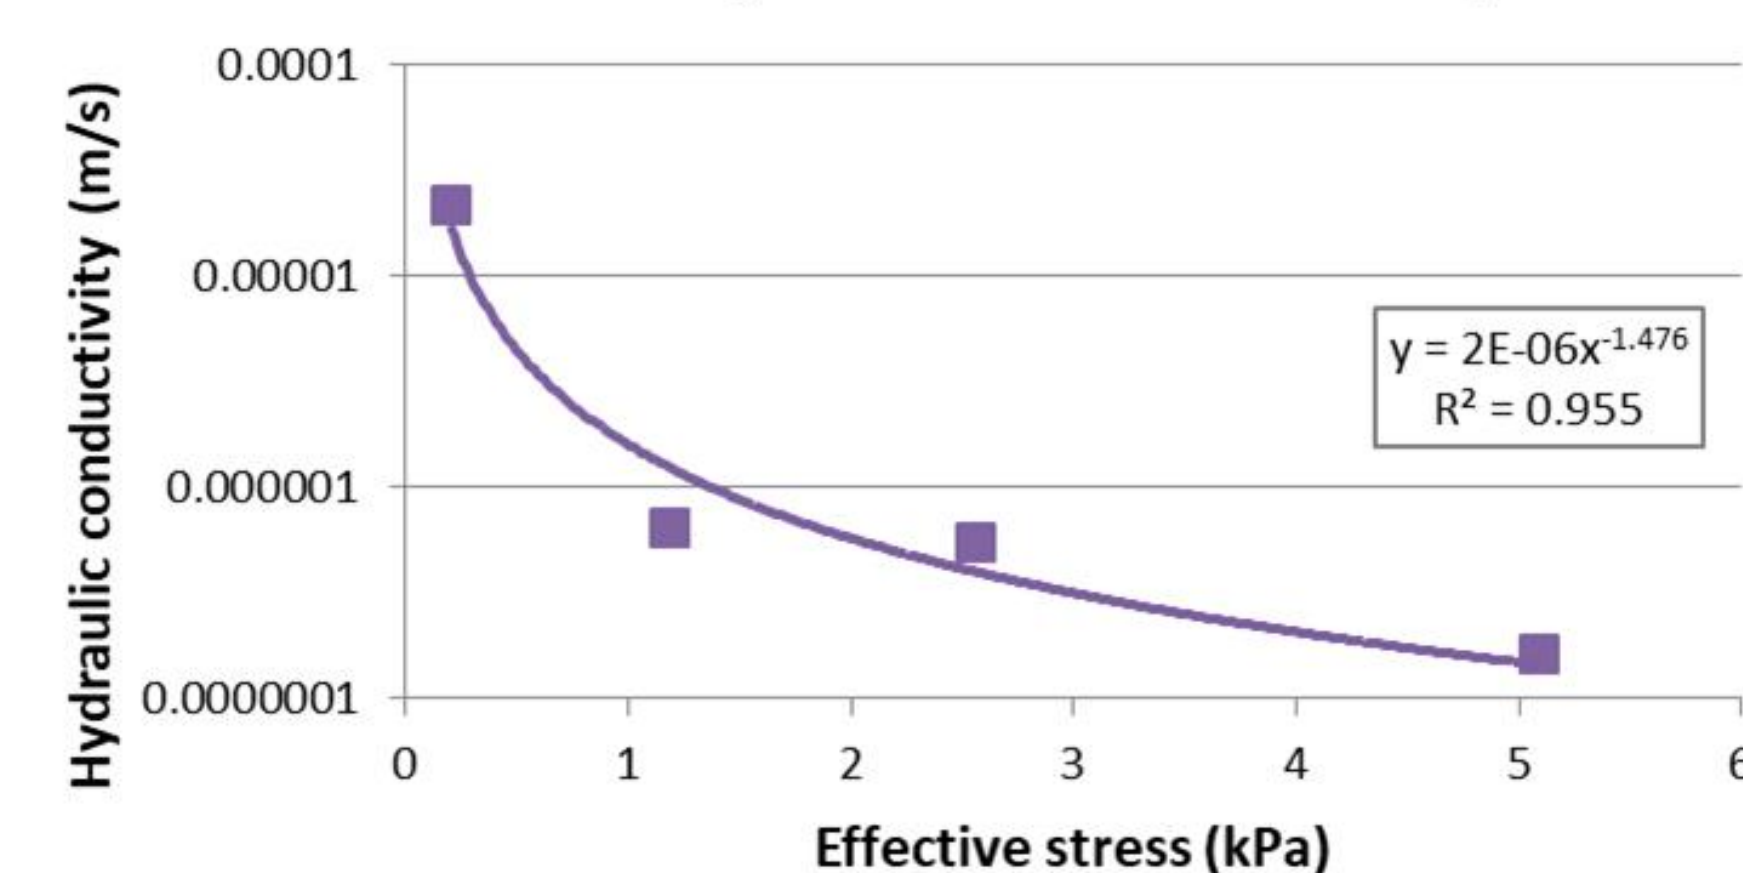


Water flow rate


2.14E-05 m/s (Initial value) = 2 meters/day
1.60E-7 m/s (Final value) = 5 meters/year
*Water flows through sand at a rate of 6 meters a day

Geochemical parameters


pH

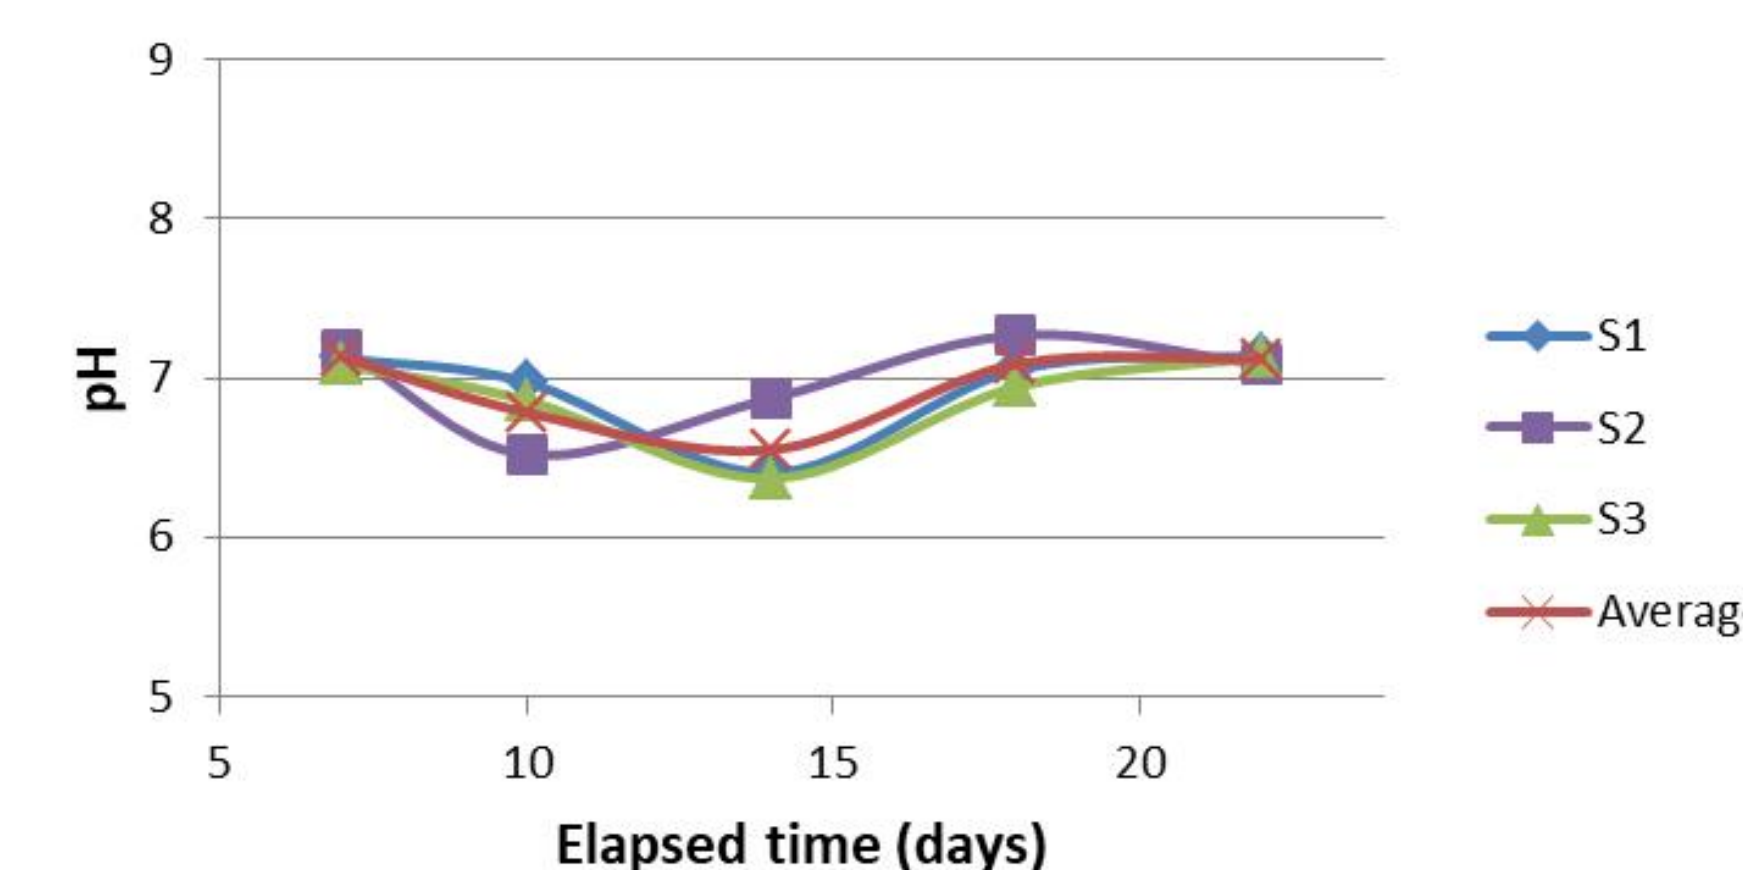

Redox Potential

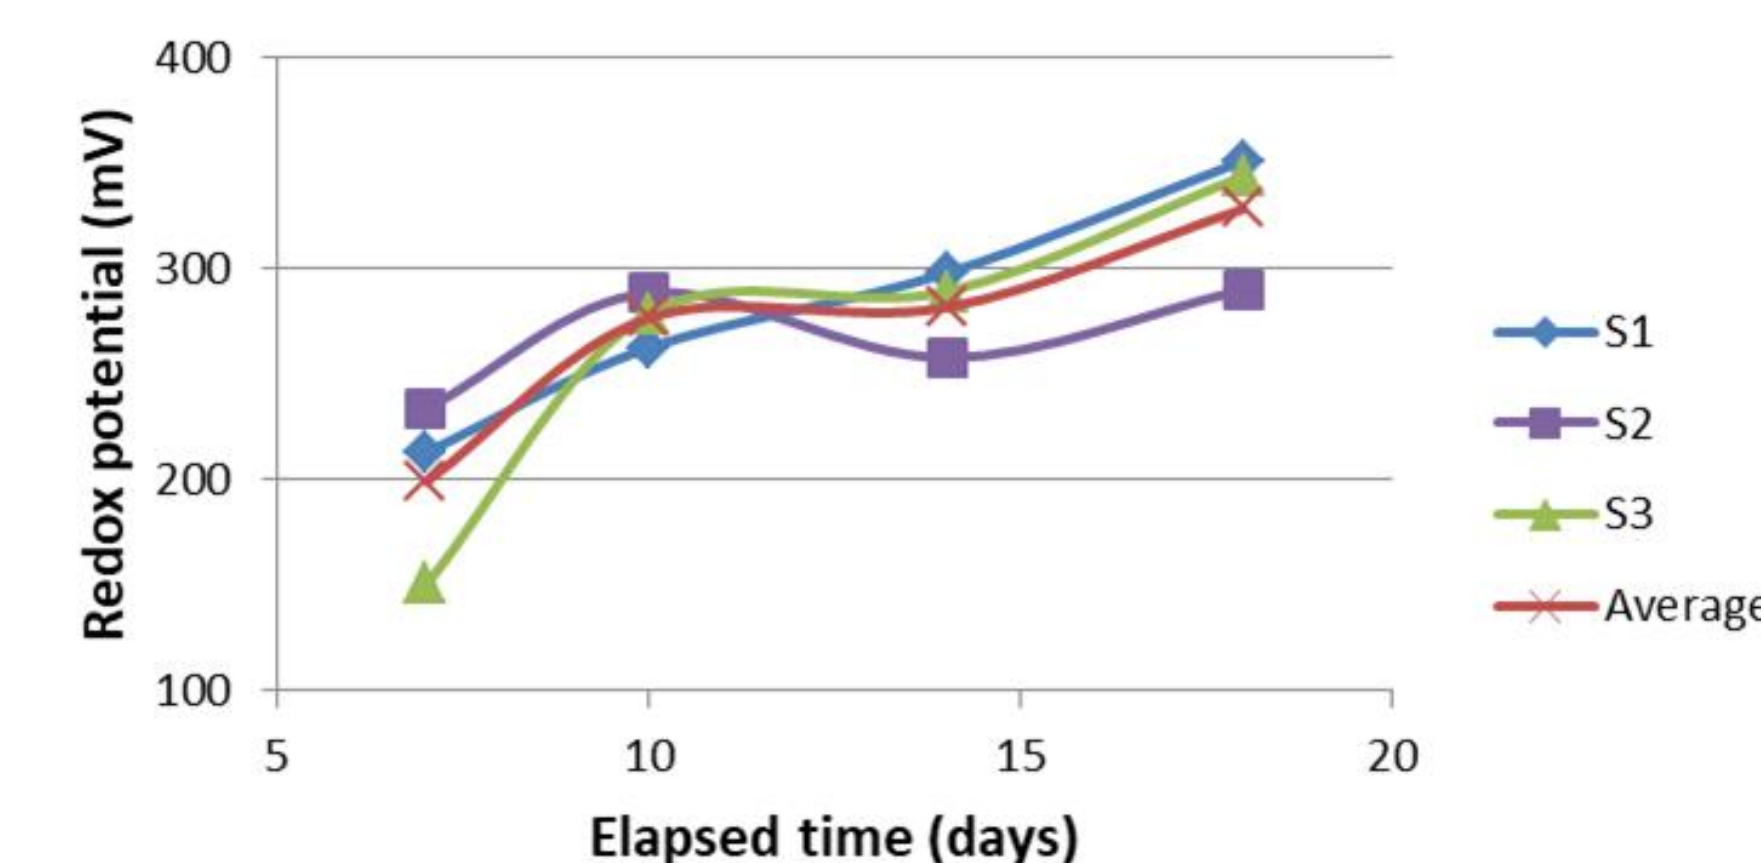

Electric Conductivity

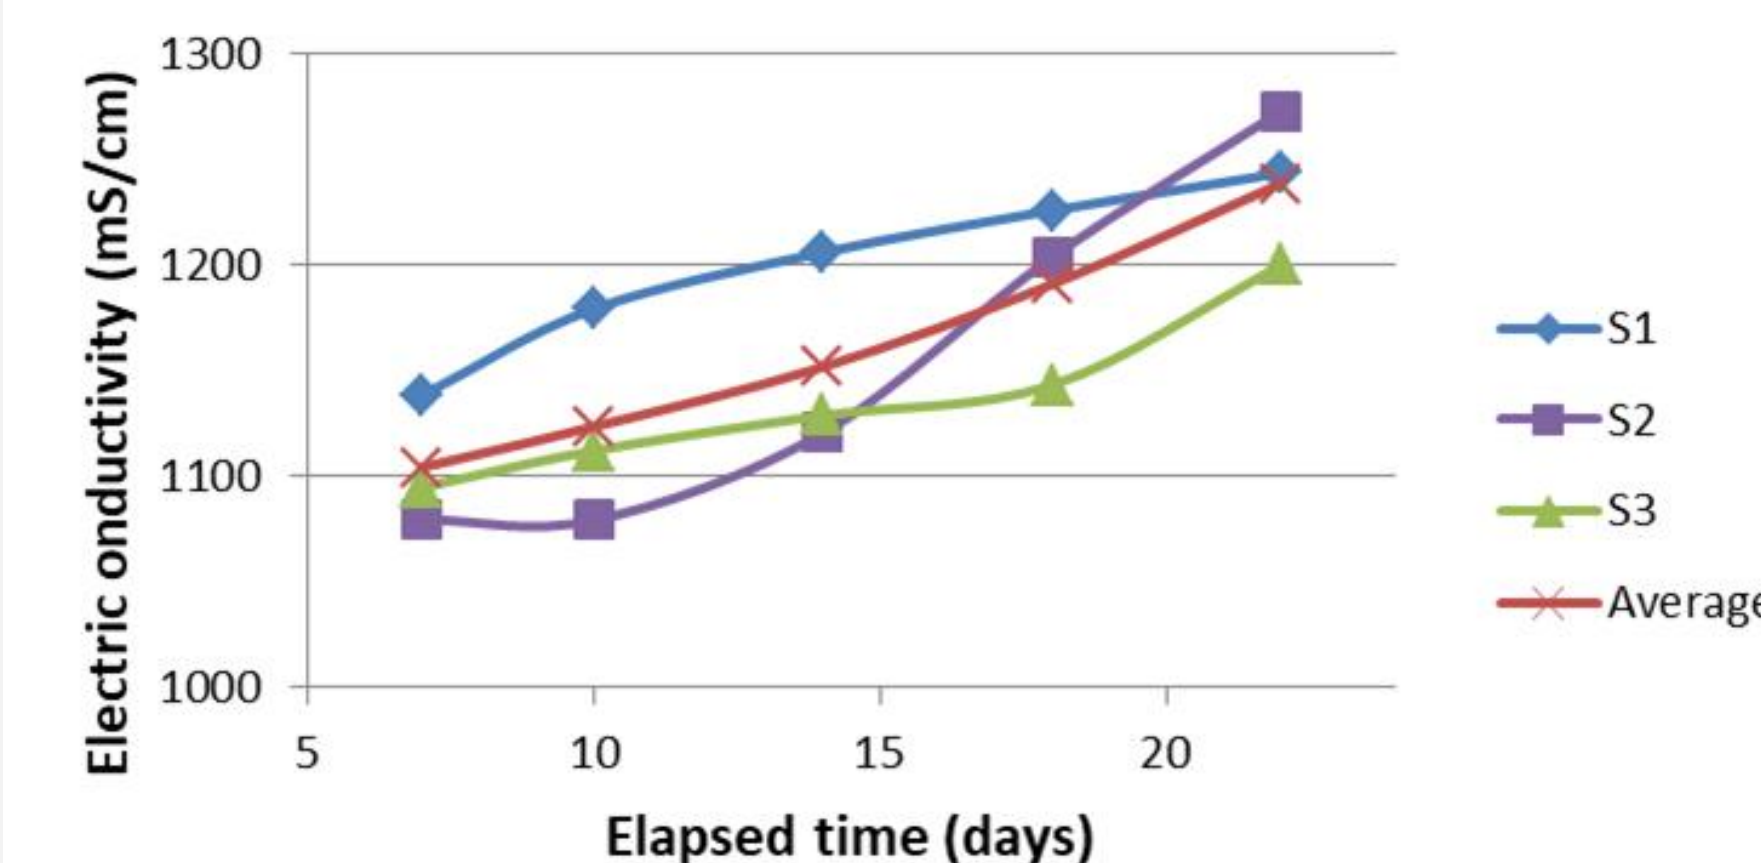

Drinking water limits

Drinking water has an acceptable pH range of 7.0 to 10.5.

Conclusions

Geotechnical Parameters:

Compressibility: The tailings exhibit greater compressibility during self-weight consolidation due to a combination of high initial void ratio and a high initial saturated hydraulic conductivity.
Hydraulic conductivity: hydraulic conductivity decreases nonlinearly as the samples are loaded because loading reduces the pore volume.

Geochemical parameters

- **pH:** There is no significant change in pH as the tailings consolidate. In this scenario, the presence of calcium carbonate has an acid neutralizing capacity
- **EH** Slight increasing trend in redox potential with a slope of 10 mV per day.
- **EC:** Electric conductivity exhibited an increasing trend with a slope of 9 mS/cm per day.

Increases in EH and EC are due to the sample coming in equilibrium with atmospheric conditions

Acknowledgements



This research was sponsored by Natural Sciences and Engineering Research Council of Canada

Literature cited

Beier, N. 2015. Development of a Tailings Management Simulation and Technology Evaluation Tool. Doctoral dissertation. Retrieved from ERA (Education and Research Archive, University of Alberta)

Sobkowicz, J.C. and Morgenstern, N.R. 2009. A geotechnical perspective on oil sands tailings. 13th International Conference on Tailings and Mine Waste, Banff, Alberta, 1-4 November 2009. University of Alberta, pp. xvii-xli.